



Geniş Halka (Master Links)

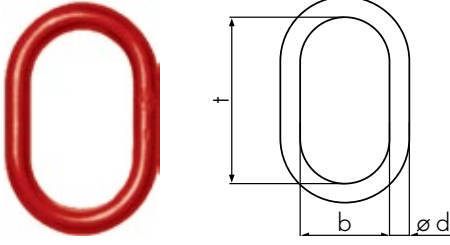

- EN 818-4, EN 13414'e göre çelik halat ve zincir sapanları için geniş halka 1 veya 2.
- Master links for 1 - or 2 - chain slings and wire ropes EN 818-4, EN 13414.

Kod Code	WLL		Ø d (mm)	t (mm)	b (mm)	Yük Weight kg
	t	Ø d				
A 13	1,6	13	110	60	0,35	
A 16	2,36	16	110	60	0,6	
A 18	3,35	18	135	75	0,9	
A 22	5,3	22	160	90	1,5	
A 26	8	26	180	100	2,35	
A 32	12,5	32	200	110	3,85	
A 36	17	36	260	140	6,2	
A 40	20	40	300	160	8,65	
A 45	25	45	340	180	13	
A 50	33,5	50	350	190	17,35	
A 56	45	56	400	200	23,54	
A 63	56	63	430	220	29,95	
A 71	71	71	460	250	46,3	
A 80	90	80	500	270	62	
A 90	112	90	560	300	87,1	
A 100	140	100	610	330	117,8	

Üç veya Dört Kollu Zincir Sapanlar İçin Geniş Halka EN 818-4 (Master Links for Three - or Four - Leg Chain Slings EN 818-4)

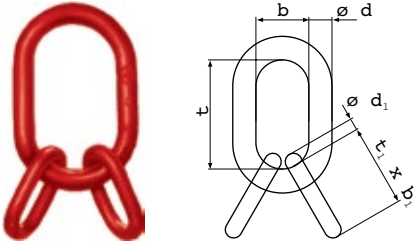

Kod Code	WLL		Ø d / Ø d1 ^t (mm)	t / t ^t (mm)	b / b1 (mm)	Yük Weight kg
	0° - 45° (t)	45° - 60° (t)				
TA ^{3/4} 6	2,36	1,7	18 / 13	135 / 54	75 / 25	1,34
TA ^{3/4} 8	4,25	3	22 / 16	160 / 70	90 / 34	2,37
TA ^{3/4} 10	6,7	4,75	26 / 18	180 / 85	100 / 40	3,64
TA ^{3/4} 13	11,2	8	32 / 22	200 / 115	110 / 50	6,24
TA ^{3/4} 16	17	11,8	36 / 26	260 / 140	140 / 65	10
TA ^{3/4} 18	21,2	15	45 / 32	340 / 150	180 / 70	18,95
TA ^{3/4} 20	26,5	19	50 / 32	350 / 150	190 / 70	23,4
TA ^{3/4} 22	31,5	22,4	50 / 36	350 / 170	190 / 75	25,9
TA ^{3/4} 26	45	31,5	56 / 40	400 / 170	200 / 80	34,25
TA ^{3/4} 28	50	37,5	63 / 45	430 / 180	220 / 90	45,45
TA ^{3/4} 32	67	47,5	71 / 50	460 / 200	250 / 100	68
TA ^{3/4} 36	85	60	80 / 63	500 / 250	270 / 125	99
TA ^{3/4} 40	106	75	90 / 63	560 / 250	300 / 125	126,3
TA ^{3/4} 45	132	95	100 / 70	610 / 280	330 / 140	173,2

Faktor/Factor/Facteur

2,1

1,5